

# XENOROX


## Silicone impregnate LH-454

Art. 454 / 4 / 0323

VFL  
Vismara Farbladen



<b>Properties</b>	XENOROX is a solvent-based, transparent silicone impregnation with high penetration and excellent water repellency. XENOROX prevents the penetration of moisture and protects against efflorescence without reducing the water vapour permeability. XENOROX silicone impregnate LH-454 is not film-forming (no surface effect) and the hardening effect is low.
<b>Field of application</b>	As water-repellent (hydrophobic) impregnation of absorbent, mineral surfaces such as masonry, concrete, brick, natural and artificial stone, etc.
<b>Pretreatment</b>	The substrate must be clean, dry and load-bearing.
<b>Processing</b>	Do not apply at temperatures below 5 °C, in direct sunlight or increased air humidity.
<b>System structure</b>	1–2 x XENOROX silicone impregnate LH-454 colourless
<b>Drying</b>	<ul style="list-style-type: none"><li>◆ Dry after 1–2 hours</li><li>◆ Can be painted over after about 12 hours (depending on the temperature, application quantity and humidity)</li></ul>
<b>Dilution</b>	Use XENOROX undiluted.
<b>Extensiveness</b>	4–8 m <sup>2</sup> per kg per application, depending on the quantity applied and the condition of the substrate.
<b>Application</b>	Roller, brush, paintbrush or spray gun. In order to achieve optimum results, it is very important to use the right tools – see KNUCHEL GUIDE on brush and roller qualities. You will find this guide both in the catalogue and on the homepage as an attachment to this product.
<b>Cleaning</b>	Clean tools immediately after use with universal or cleaning thinner.
<b>Delivery form</b>	Packages of 25, 10 and 5 litres as well as 1000ml and 500ml.
<b>Shelf life</b>	XENOROX can be stored for at least 18 months in the well closed original container. Store in a cool and dry place.
<b>Viscosity</b>	Low viscosity / 10–11 seconds DIN 4mm
<b>Density</b>	0,90 ± 0,05 g/cm <sup>3</sup>
<b>Solid content</b>	7,6 ± 1 %
<b>Binder base</b>	Modified silicone resins
<b>Gloss level</b>	Matt
<b>Colours</b>	Colourless
<b>Registration</b>	CPID 279863

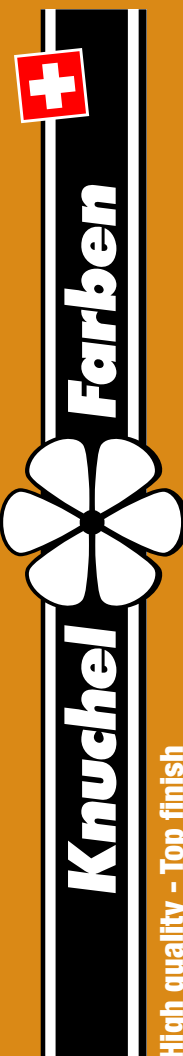

**Classification**

For information on chemical properties and hazards as well as regulations regarding transport, processing, storage, disposal, etc., please refer to the safety data sheet.

**Note**

This leaflet is only intended as a reference and non-binding advice. The processing must be adapted to the corresponding conditions. In special cases we recommend to contact our technical service. However, all data and information on the suitability and application of the delivered products do not exempt the processor from carrying out his own tests and trials. A claim for damages for omitted, incomplete or incorrect information is excluded. This applies in particular also if thinners and other products are used in the paint build-up system.

Furthermore, we refer to our General Terms and Conditions (GTC) on our homepage.